High Quality With Global Standards, CE EMCB, RoHs, FCC, Certificated.



Specifiication

	Indoor				
Pixel Pitch	2.5mm	1.875mm	1.56mm	1.25MM	0.93MM
LED type	SMD2020	SMD1515	SMD1010	SMD1010	MINI4in1
Density(Dots/m²)	160000	284444	409600	640000	1137778
Scan	1/45	1/45	1/54	1/45	1/60
Cabinet Resolution	240x135	320x180	384x216	480x270	640X360
Module Resolution	120x135	160x90	192x108	240X135	320X180
Module Size(mm)	300x337.5 300x168.75				
	9.84x11.07ft	9.84x11.07ft 9.84x5.54ft			
Waterproof Grade	IP30				
Brightness	800-1000 Nits				
Cabinet Weight	4.2 kg/pcs				
Cabinet Size	600x337.5x32.5mm				
	19.69x11.07x1.07ft				
Material	Aluminum				
View Angle	160 Degree(Horizontal) 140 Degree(Vertical)				
Refresh Rate	3840HZ				
Digital Processing	14/16 Bits				
Gray Scale	16384/65536 Level				
Colors	687 Million				
Color Temperature	4500-8500 Adjuststable				
Brightness Control	255N/A				
Contrast Ratio	8000:1				
Control Mode	Sync				
Life Time	100,000 Hours				

Prevision MA Series fine pixel pitch LED wall screen MA-600:P2.5/P1.875/P1.56/P1.25/P0.93



Fine pixel pitch Indoor LED display with front and back maintenance and flexible assembly.

Prevision MA Series-600 Indoor LED Display is the latest product from Prevision, featuring a unique design and advanced features. With its removable back cover, this display offers improved visual effects, delivering clean images and videos with uniform color.

MA Series-600:P2.5/P1.875/P1.56/P1.25/P0.93

01.Structure:

Die-casting aluminum structure design for heat dissipation (fanless), IP30.



03.Magnetic Modules

Modules with different pixel pitch, interchangeable. High precision aluminum frame, seamless and frameless.



02.Excellent Viewing Effect

HDR technology, showing unprecedented excitement







In Prevision

04.Smart

Smart module option available to detect pixel failure, voltage, temperature and working time.






MA Series-600:P2.5/P1.875/P1.56/P1.25/P0.93

<u>05.Thin</u>


Ultra thin design of 32.5mm, saving your installation space

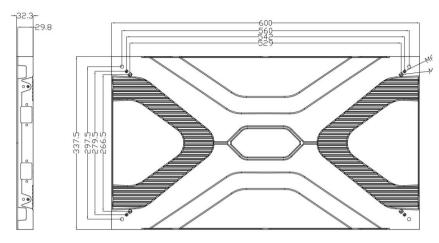




07.No visable cable

Cables are inside the cabinet, with power/signal 2 in 1 cable ,keep the display back clear

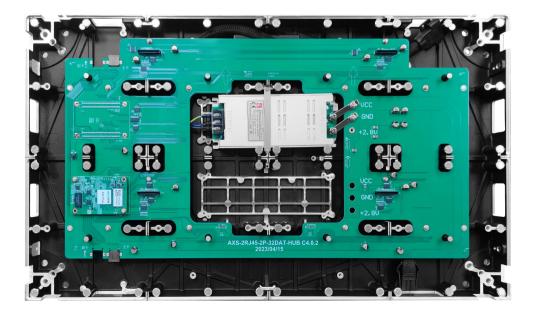

06.Gap adjustable

keep the uniformity of the hole cabinet

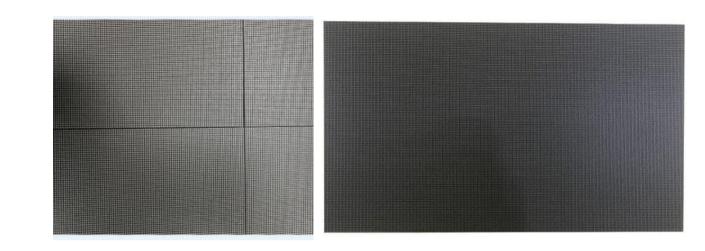

08.install methods






MA Series-600:P2.5/P1.875/P1.56/P1.25/P0.93

09.One cabinet achieve 2K,4K,8K with different pixels16:9

16:9 Golden Ratio

Standard 27.5" Size FHD/4K Pixel to Pixel Resolutions .

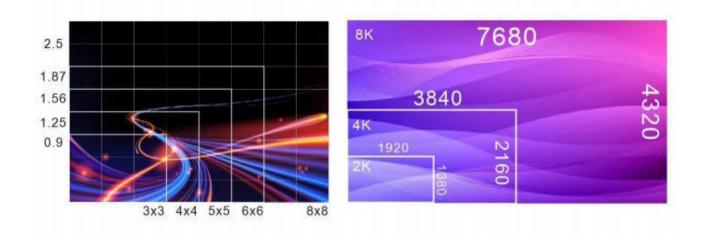

11.Integrated Commecrcial LED TV Display

Standard 2K/4K, Various Sizes



10.Wall Installatio

Direct wall-mounted design without steel structure. Full front maintenance.



12.Hanging System



